

Fulflo® FE Filter Vessels

- Carbon Steel
- 304L and 316L Grade Stainless Steel

Multi-Cartridge Filter Vessel Series

FE Model Cartridge Filter Vessels Designed for Economical Filtration of Liquids and Gases

The FE Filter Vessel Series accommodates double-open-end (DOE) and single-open-end (SOE) filter cartridges in 10 in, 20 in and 30 in lengths.

Applications

- Potable Water
- Process Water
- Edible Oils
- Coatings
- Lubricants
- Coolants
- Cutting Oils
- Solvents



Features and Benefits

- Single O-ring design closure assures quick, positive cover sealing.
- Swing bolts with eyenuts for fast, easy opening and closing of cover.
- Maximum design pressure is 150 psig (10.3 bar) at 450°F* (232°C) and 200 psig at 100°F (38°C) plus full vacuum.
- Buna-N O-ring standard with EPR, Viton** and fluoropolymer available.
- ASME Code UM stamp is standard (U stamp is optional).
- Threaded vent and drain connections.
- Adjustable leg height.
- Threaded or flanged inlet and outlet.
- Side inlet; cover opens without disconnecting piping.
- Side inlet, bottom outlet and crevice-free welded design provide a smooth interior for easy wash-out and cleaning.

Process Filtration Division




WARNING! FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection for the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.



Multi-Cartridge Filter Vessel Series

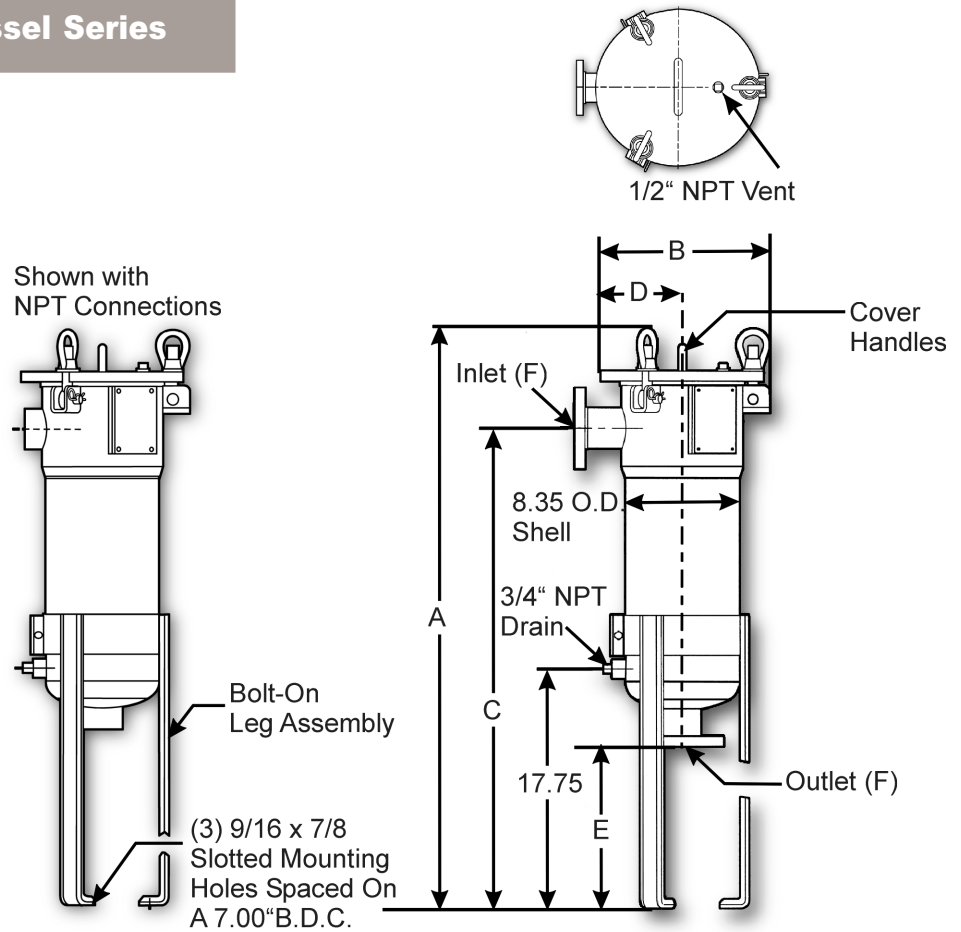

Design Specifications

Model	No. & Length of Cartridges (in)	Typical Aqueous Flow† (gpm)	Dimensions (in)		C	D	E	F	Shipping Weight (lbs)	Volume (gal)
			A	B						
FE6-1-2	(6) 10	30	33.00	12.25	25.56	5.75	13.19	2 NPT	82	3.6
FE6-1-2F	(6) 10	30	33.00	14.50	25.56	8.00	12.00	2 NPS	90	3.6
FE6-2-2	(6) 20	60	43.06	12.25	35.63	5.75	13.19	2 NPT	87	5.4
FE6-2-2F	(6) 20	60	43.06	14.50	35.63	8.00	12.00	2 NPS	95	5.4
FE6-3-2	(6) 30	90	53.13	12.25	45.69	5.75	13.19	2 NPT	92	7.8
FE6-3-2F	(6) 30	90	53.13	14.50	45.69	8.00	12.00	2 NPS	100	7.8
FE6-3-3F	(6) 30	90	53.13	14.50	45.69	8.00	11.75	3 NPS	110	7.8

† Actual rate is dependent on fluid viscosity, micron rating, contaminant and media type. Consult flow charts for each application.

Ordering Information

4L	FE	6	3	2F
Material	Model	Number of Columns	Number of 10 in Cartridges/Column	Inlet/Outlet Flange Size
None = Carbon				
Steel			1	2
4L = 304L			2	3
Stainless Steel			3	No F = NPT
6L = 316L				
Stainless Steel				

Process Filtration Division

* Operating temperature limited to 250°F (121°C) by standard Buna-N O-ring and exterior paint on carbon steel models. Optional O-ring materials are available.

** A trademark of E. I. du Pont de Nemours & Co.