

Fulflo® WY Filter Vessels

- Iron and Steel
- Stainless Steel

Multi-Cartridge Filter Vessel Series


Fulflo® WY Multi-Cartridge Filter Vessels Suitable for a Wide Range of Industrial Applications

Fulflo® WY Multi-Cartridge Filter Vessels are specifically designed for the filtration of liquids used in inks and paints and are also suitable for other industrial applications. The WY vessel series can be quickly disassembled for fast and easy cleaning and servicing.

WY Filter Vessels accommodate either double-open-end (DOE) or single-open-end (SOE) filter cartridges in 10 in, 20 in and 30 in lengths.

Applications

- Inks
- Paints & Coatings
- Liquid Fuels
- Food & Beverage
- Pharmaceuticals
- Liquid Chemicals
- Petro Chemicals
- Mineral & Vegetable Oils
- Hydraulic Fluids

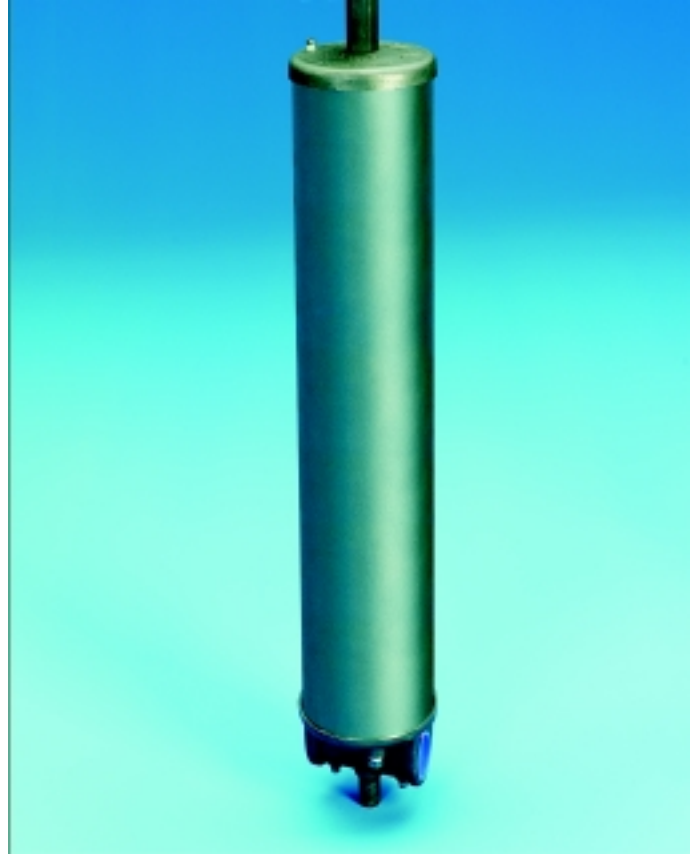

Features and Benefits

- In-line pipe connections for easy installation.
- Vents and drains standard on all models.
- Single center bolt construction allows filter head and shell separation for quick servicing and easy cleaning.
- Standard Buna-N flat gasket with optional fluoropolymer or asbestos substitute gaskets.
- Flow rates to 90 gpm (341 lpm).
- Vents are 1/4-18 NPT with cock.
- Maximum operating pressure is 150 psi (10.3 bar) at 150°F (66°C).
- WY3 models have one 3/8-18 NPT body drain and one 1/4-NPT inlet drain.
- WYF models have two 1/2-14 NPT body drains and two 1/4-18 NPT inlet/outlet drains.

Process Filtration Division




WARNING! FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection for the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.



Multi-Cartridge Filter Vessel Series

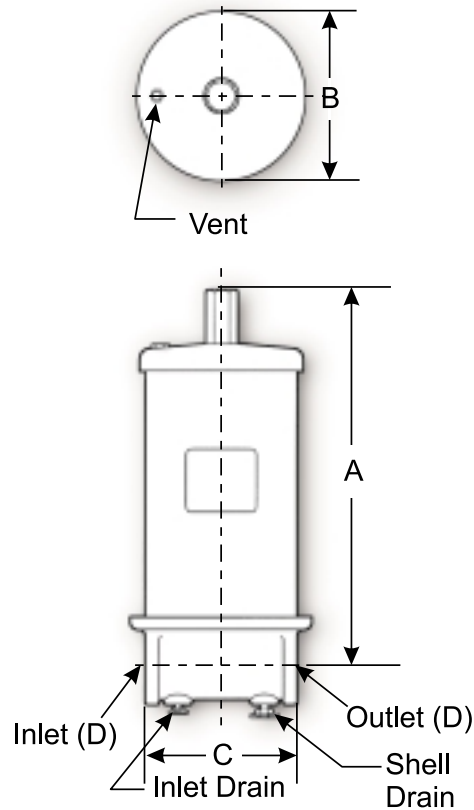

Design Specifications

Models		Maximum Flow Rate [†] (gpm)	No. & Length of Cartridges (in)	Dimensions (in)				Shipping Weight (lbs)
Iron & Steel	Stainless Steel			A	B	C	D (NPT)	
WY3S-10-1-1/2	WY3SS-10-1-1/2	15	(3) 10	17-5/8	7-9/16	6-5/8	1-1/2	46
WY3DS-10-1-1/2	WY3DSS-10-1-1/2	30	(3) 20	27-5/8	7-9/16	6-5/8	1-1/2	62
WYFS-10-2	WYFSS-10-2	30	(6) 10	18-3/4	9-3/8	8	2	68
WYFDS-10-2	WYFDSS-10-2	60	(6) 20	28-3/4	9-3/8	8	2	94
WYFTS-10-2	WYFTSS-10-2	90	(6) 30	38-3/4	9-3/8	8	2	120

[†] Rated liquid capacity based on initial pressure drop of 3 psi (0.2 bar) with a 20µm cotton wound depth cartridge and fluid viscosity equivalent to water. Flow rates for other fluids vary according to nature of fluid, contaminant, degree of clarity desired and operating conditions. Particle removal curves are available to help figure pressure drop and cleaning efficiency for every application.

Supplemental Data

Raised face flanges can be supplied to mate with flanged piping. Add F suffix.

Ordering Information

WY	3	D	S	10	2F
Design Series	Number of Columns	Cartridge Length (in)	Material	Standard	Inlet/Outlet Size
	3 = 3 F = 6	No Symbol = 10 D = 20 T = 30	S = Carbon Steel SS = 316 Stainless Steel		F = Flanged No Symbol = NPT

Process Filtration Division

* A trademark of E. I. du Pont de Nemours & Co.

Parker Hannifin Corporation
Process Filtration Division
P.O. Box 1300
Lebanon, Indiana 46052
Toll Free 1-888-C-FULFLO (238-5356)
Telephone (765) 482-3900
Fax (765) 482-8410
<http://www.parker.com>

