



## Specifications

### Materials of Construction:

- Head and Bowl: High Purity PFA or PVDF
- O-Ring: FEP Encapsulated Viton<sup>1</sup>
- Locking Ring: PVDF (non-wetted part)

### Connections:

- Inlet/Outlet: 3/4" or 1" Flare  
3/4" or 1" Butt-Weld
- Vent and Drain: 1/4" Flare  
1/4" Butt-Weld  
1/4" NPTF  
1/4" Closed  
3/8" Flare


### Maximum Operating Specifications:

- 65 psig (4.5 bar) at 203°F (95°C)
- 75 psig (5.2 bar) at 68°F (20°C)

### Cartridge Configurations Supported:

10"	TC (222/Flat End Cap) STC ( SS Reinforced 222/Flat End Cap)
20"	TC (222/Flat End Cap) STC ( SS Reinforced 222/Flat End Cap)
30"	TC (222/Flat End Cap) STC ( SS Reinforced 222/Flat End Cap)

### Housing Flow Rate (liquid):

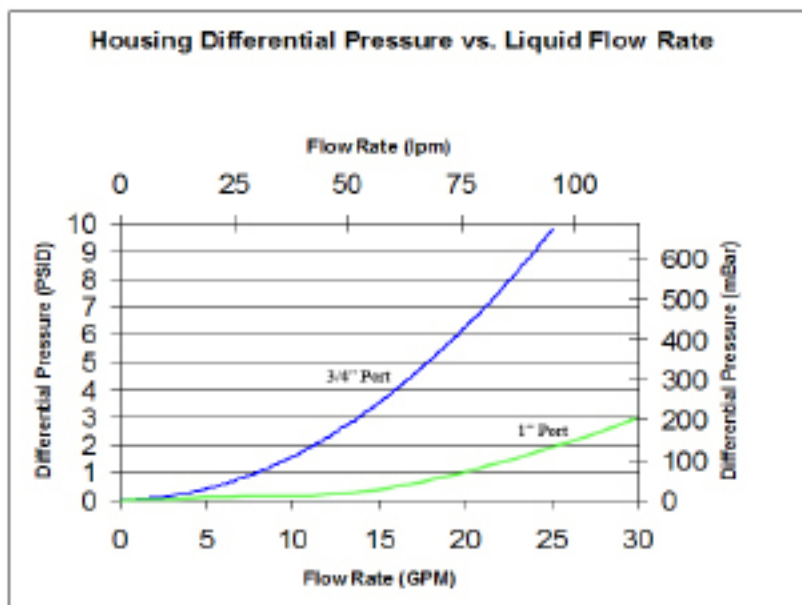

### Dimensional Data:

Housing Part Number	Housing Style	Overall Width	Overall Length
TruFluor+ 10"	3/4" Butt-Weld Pipe	9.0" / 22.9 cm	16.0" / 40.6 cm
	3/4" Flare	10.5" / 26.7 cm	19.5" / 49.5 cm
TruFluor+ 20"	1" Butt-Weld Pipe	9.0" / 22.9 cm	16.0" / 40.6 cm
	1" Flare	11.0" / 27.9 cm	19.5" / 49.5 cm
TruFluor+ 20"	3/4" Butt-Weld Pipe	12.0" / 30.5 cm	25.7" / 65.3 cm
	3/4" Flare	10.5" / 26.7 cm	29.3" / 74.4 cm
TruFluor+ 30"	1" Butt-Weld Pipe	9.0" / 22.9 cm	25.7" / 65.3 cm
	1" Flare	11.0" / 27.9 cm	29.3" / 74.4 cm
TruFluor+ 30"	3/4" Butt-Weld Pipe	12.0" / 30.5 cm	35.5" / 90.2 cm
	3/4" Flare	10.5" / 26.7 cm	39.1" / 99.3 cm
TruFluor+ 30"	1" Butt-Weld Pipe	9.0" / 22.9 cm	35.5" / 90.2 cm
	1" Flare	11.0" / 27.9 cm	39.1" / 99.3 cm

## Ordering Information

TFP	10	F	08	F	02	T
Model	Bowl Length	Connection Type	Connection Size	Drain/Vent Type	Drain/Vent Size	Seal Material
TFP = TruFluor Plus	10 = 10 in 20 = 20 in 30 = 30 in	F = Flare W = Butt Weld	08 = 3/4 in 10 = 1"	C = Closed <sup>2</sup> F = Flare <sup>2</sup> W = Butt Weld	2 = 1/4 in	T = FEP Encapsulated Viton <sup>1</sup>

## Process Filtration Division

<sup>1</sup> Trademark of E. I. du Pont de Nemours & Co.  
<sup>2</sup> Additional charges apply