



Versaflex™ Series VF-250SB

Spun-Bonded FILTER CARTRIDGES

Versaflex™ Series Spun-Bonded Cartridges are manufactured from 100% polypropylene fibers. The depth filtration cartridge construction offers greater performance flexibility in a broad range of solutions.

APPLICATIONS

- Commercial
- Medical
- Pharmaceutical
- Dyes
- Municipal
- Plating Solutions
- Food and Beverage
- Oils
- Water
- Inks
- Paints

CARTRIDGE OPERATION

In water applications, Versaflex™ Spun-Bonded Filter Cartridges will not impart taste, odor or colors into the solution. For industrial applications, this cartridge offers superior chemical resistance and is not prone to bacterial attack. The thermal bonding process eliminates the need for a core support. This process also greatly reduces fiber migration.

FEATURES

- Manufactured from pure 100% polypropylene
- Designed for chemical compatibility
- Spun fibers form a true gradient density from outer to inner surfaces
- Available in a wide range of lengths up to 40"
- Three different micron sizes available

SPECIFICATIONS

Component	Material/Value
Fiber Media	Polypropylene
Temperature Rating	40°F (4.4°C)–145°F (62.8°C)

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.



Tested and Certified by NSF International to NSF/ANSI Standard 42 for material requirements only.

COMPONENT




**Pentair
Industrial**

Versaflex™ Series VF-250SB Filter Cartridges

ORDERING INFORMATION

Custom configurations available; please contact Customer Service.

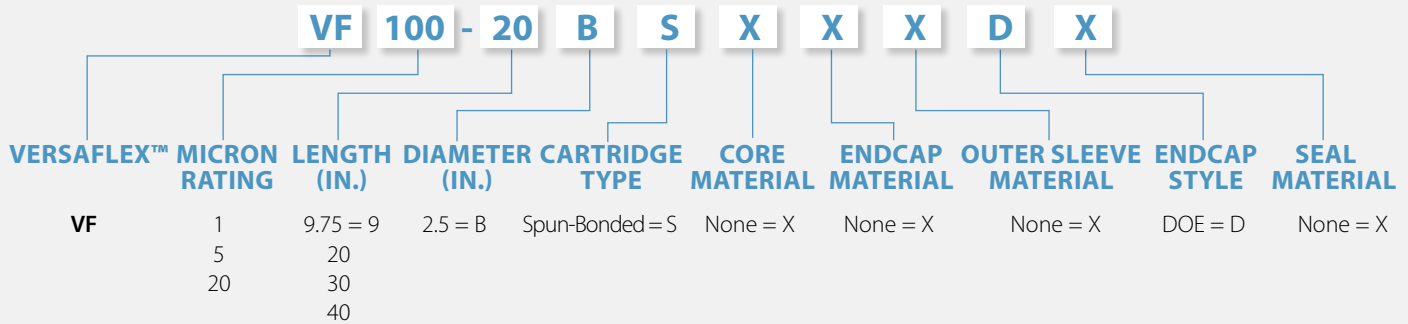


DIMENSIONS AND CONSTRUCTION

Versaflex™ Series VF-250SB	
Diameter (Inches)	2.5
Length (Inches)	9.75 •
	10
	20 •
	30 •
	40 •
Media	S
Center Core	
Endcap	
Outer Sleeve	
Endcap Style	DOE •
	S2
	F2
	S6
	F6
	S3
	S4
Seal	

Cartridge Availability Key	
S	Spun-Bonded
DOE	Double Open End

TEST DATA

Versaflex™ Series VF-250SB Cartridge Water Flow Rate

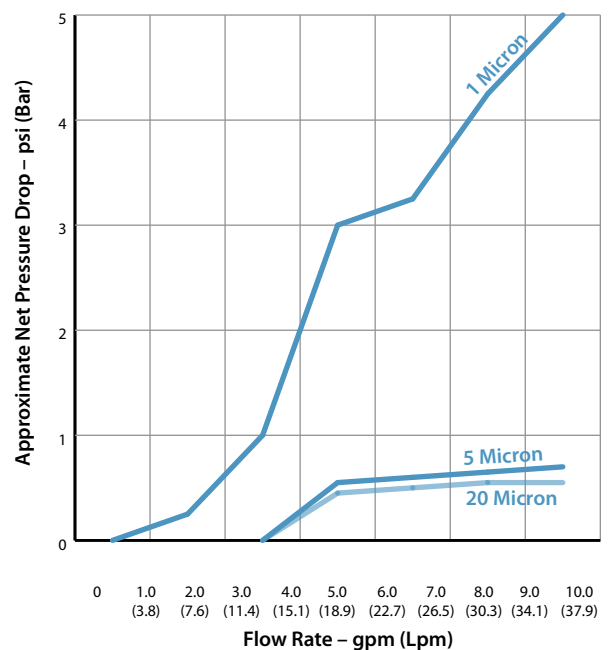

502 Indiana Avenue, Sheboygan, WI 53082-1047
 800.869.0325 574.278.7161 FAX 574.278.7115
 support@pentairindustrial.com www.pentairindustrial.com