



Biflex™ Series BF-200AB

Absolute* Pleated Cellulose Polyester FILTER CARTRIDGES

Absolute* Biflex™ Series Pleated Cellulose Polyester Cartridges are the benchmark for critical industrial applications that demand optimal fluid filtration. Biflex cartridges are available in a broad range of micron ratings to match specific applications.

APPLICATIONS

- Aqueous Fluids
- Oil and Gas
- Chemicals
- Pharmaceuticals
- Electronics
- Photographic
- Magnetic Media
- Water

CARTRIDGE OPERATION

Biflex™ Series BF-200AB Cartridges are absolute-rated cartridges that are manufactured using proprietary cellulose and polyester fibers held together by an acrylic binder. The media provides a gradient density matrix of microfibers with a tapered pore structure that allows for true depth loading of contaminants throughout, and a Beta 5000 rated efficiency of 99.98%.

The optimized construction of Biflex cartridges helps maximize profitability by reducing process downtime, equipment repair or replacement, labor, and disposal costs.

FEATURES

- Available in 2.25-, 2.5- and 2.75-inch diameters
- Blended cellulose polyester media specially formulated for aqueous fluids
- 99.98% (Beta 5000) efficiencies at stated micron ratings
- Encapsulated design ensures gasket stays in place during change-outs
- Long cartridge life reduces change-out frequency
- Higher flow rates with low pressure drop
- Fixed pore structure minimizes fiber migration

*Custom housings are available for these cartridges.
Contact our technical support team for more details.*

SPECIFICATIONS

Component	Material/Value
Fiber Media	Blended Cellulose Polyester
Maximum Temperature Rating	180 °F (82.2 °C) (275 °F with certain options)
Maximum Differential Pressure	75 PSID




**Pentair
Industrial**

*Absolute defined as $B_5 > 5,000$
(99.98% efficiency at stated micron size)

Biflex™ Series BF-200AB Filter Cartridges

ORDERING INFORMATION

Custom configurations available; please contact Customer Service.

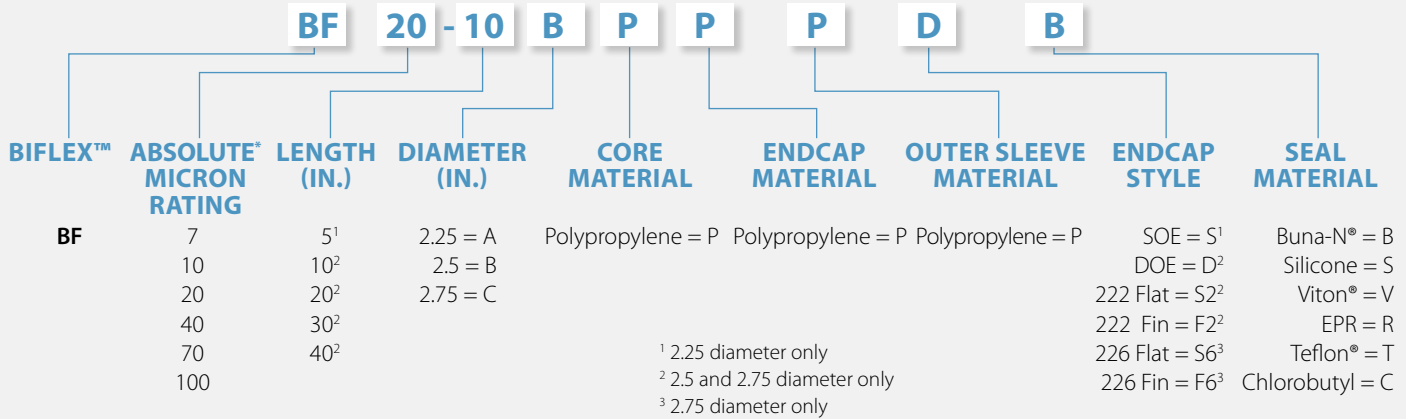


DIMENSIONS AND CONSTRUCTION

Biflex™ Series BF-200AB			
Diameter (Inches)	2.25	2.5	2.75
Length (Inches)	5	•	
	9.75		
	10		•
	18		
	19.5		
	20		•
	29.25		
	30		•
	36		
	39		
	40		•
	44		
	70		•
100		•	
Center Core	P	P	P
Endcap	P	P	P
Outer Sleeve	P	P	P
Endcap Style	DOE		•
	SOE	•	
	S2		•
	F2		•
	S6		•
	F6		•
Seal	S	B, S, V, T, R, C	B, S, V, T, R, C

Cartridge Availability Key			
P	Polypropylene	V	Viton®
S	Silicone	T	Teflon®
B	Buna-N®	C	Chlorobutyl
R	EPR		

TEST DATA

Biflex™ Series BF-200AB Cartridge Water Flow Rate

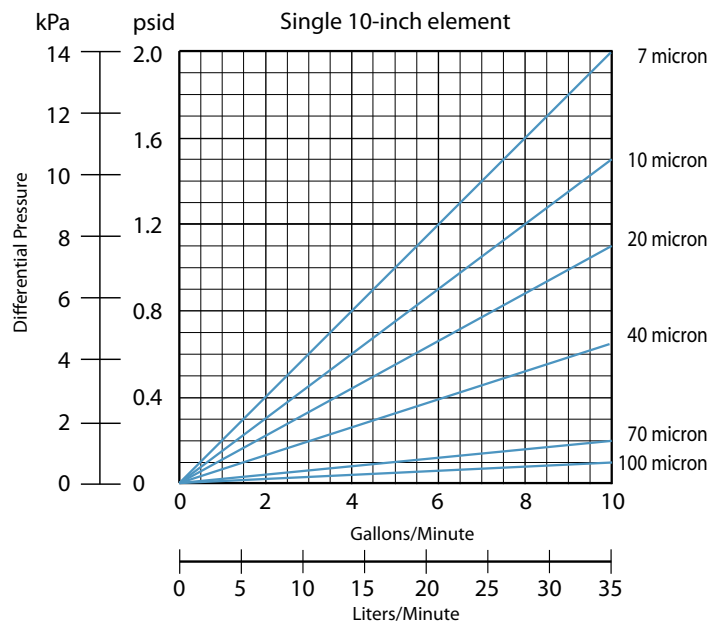

Flow rate is per single 10-inch element. For other liquids, multiply the ΔP by the fluid's viscosity in centipoise. For longer cartridges, divide the ΔP by the number of 10-inch equivalents.



502 Indiana Avenue, Sheboygan, WI 53082-1047
800.869.0325 574.278.7161 FAX 574.278.7115
support@pentairindustrial.com www.pentairindustrial.com